




E-X BOHR RS 4,8x20 with washer E14

Stainless self-drilling screws for connecting steel sheets



Product code	EAN code	DxL	Color	h min	h max	Max. drilling capacity	Head size	Washer diameter	Single box	Outer carton
		mm	-	mm	mm	mm	mm	mm	pcs.	pcs.
72010402	0000720104026	4,8 x 20	zinc	2x0,75	7	2x1,00	8	14	1000	-



MATERIALS:

- Screws are made of stainless steel with drilling point made of surface-hardened carbon steel, zinc plated
- Washer is made of stainless steel with vulcanized EPDM layer
- Screw heads and washers may be coated with lacquer coating


INSTALLATION:

- Maximum drilling capacity in steel up to **2x1,00 mm**
- For installation, use cappers with a maximum speed of 2200 rpm with regulated torque

TECHNICAL ASSESSMENTS:

- ETA-11/0174

MAXIMUM AND MINIMUM THICKNESS OF FIXED ELEMENTS:

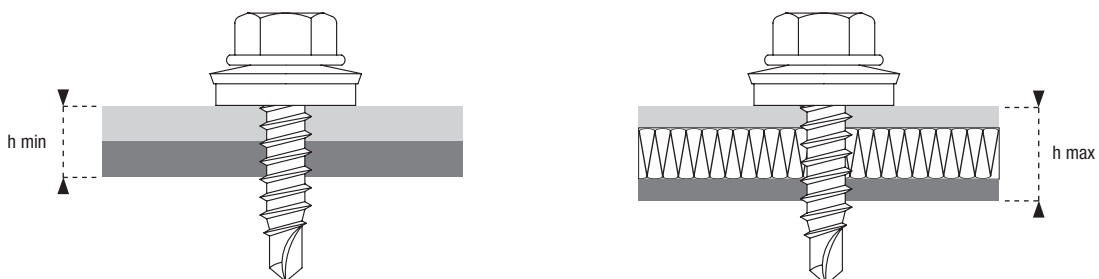

- h min** – minimum thickness of the fixed elements. Is the sum of: the minimum thickness of the substrate and the minimum thickness of the steel sheet tested with specific screw type
- h max** – maximum thickness of the fixed elements. Is the sum of: the thickness of the substrate, the thickness of the steel sheet and the thickness of components located between the substrate and steel sheet or the thickness of the air gap

TECHNICAL SPECIFICATIONS

Fastener designation	Steel sheet thickness ¹⁾ , [mm]	Characteristic share load, [kN]*							
		Steel substrate thickness ²⁾ , [mm]							
		0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00
E-X BOHR RS 4,8xL	0,50	-	-	-	-	-	-	-	-
	0,55	-	-	-	-	-	-	-	-
	0,63	-	0,70	1,00	1,30	1,30	1,30	-	-
	0,75	-	0,90	1,20	1,50	1,60	1,70	-	-
	0,88	-	1,10	1,40	1,80	2,00	-	-	-
	1,00	-	1,20	1,60	2,00	-	-	-	-
	1,13	-	1,40	1,80	-	-	-	-	-
	1,25	-	1,60	-	-	-	-	-	-
	1,50	-	-	-	-	-	-	-	-
	1,75	-	-	-	-	-	-	-	-
2,00	-	-	-	-	-	-	-	-	

* In order to determine the design resistance characteristic value should be divided by a safety factor of 1.33

¹⁾ steel grade S280GD, S320GD according to EN 10346

²⁾ steel grade S235 according to EN 10025-1; S280GD, S320GD according to EN 10346

Fastener designation	Steel sheet thickness ¹⁾ , [mm]	Characteristic tension load, [kN]*							
		Steel substrate thickness ²⁾ , [mm]							
		0,63	0,75	0,88	1,00	1,13	1,25	1,50	2,00
E-X BOHR RS 4,8xL	0,50	-	-	-	-	-	-	-	-
	0,55	-	-	-	-	-	-	-	-
	0,63	0,40	0,50	0,60	0,70	0,90	0,90	-	-
	0,75	0,40	0,50	0,60	0,70	0,90	1,00	-	-
	0,88	0,40	0,50	0,60	0,80	1,10	-	-	-
	1,00	0,40	0,50	0,60	0,80	-	-	-	-
	1,13	0,40	0,50	0,70	-	-	-	-	-
	1,25	0,40	0,50	0,70	-	-	-	-	-
	1,50	-	-	-	-	-	-	-	-
	1,75	-	-	-	-	-	-	-	-
2,00	-	-	-	-	-	-	-	-	

* In order to determine the design resistance characteristic value should be divided by a safety factor of 1.33

¹⁾ steel grade S280GD, S320GD according to EN 10346

²⁾ steel grade S235 according to EN 10025-1; S280GD, S320GD according to EN 10346